



HIGH VOLUME
LOW SPEED FANS

APPLICATION

The THS range of High Volume Low Speed fans are designed to be installed in high ceilings to redistribute air towards floor level.

They generate a gentle and slowly moving airstream which covers a large area and create a cooling effect in summer while they de-stratify the air in winter pushing the warm air down at floor level.

They are suitable for commercial, industrial and agricultural applications such as warehouses, manufacturing facilities, industry, shopping malls, airports, sports centres, greenhouses, dairy farms.

CONSTRUCTION

- Upper frame made of painted steel welded structure to protect the motor.
- Safety cables and 800mm length downrod provided as standard.
- Specially designed airfoil made from aluminium EN AW 6063 T6. The surface is anodized to avoid corrosion.
- Aerodynamically shaped blade tips made in plastic.
- Hub provided with safety ring.
- Aesthetic hub cover made in plastic.
- High efficiency three-phase EC brushless motor, which are specifically designed for HVLS application, 200-480Vac/3ph/50/60Hz, IP65, with integrated electronic system and EMC filters. Suitable for S1 continuous service. Speed controllable.

FEATURES & BENEFITS

- "Wide cone" air distribution under the fan.
- Top silent operation thanks to the gearless motor and the special airfoil design.
- Ideal to integrate the HVAC system, for energy saving and CO2 emission reduction.
- In winter months they are suitable to de-stratify the air pushing the warm air towards the floor level, so to even the temperature and to prevent the HVAC system to run as hard.
- In summer time the constant and gentle breeze eliminates hot and cool spots in the building by improving the internal environment and creating a natural cooling effect. The air movement also helps keeping the insects away.
- No ordinary maintenance.
- Robust steel structure for long life.
- Key safety features (main security wire, additional stabilising cables, hub safety ring).
- Blade tips to optimise performances and acoustic comfort.
- Hub cover to protect the motor from dust and for a better aesthetics.
- Simplified electrical connection: pre-cabled.
- Integrated EMC filters to prevent electromagnetic interference from other devices.
- Fan are suitable for operating temperatures from 0°C to +50°C.
- Unit performances are tested to the latest AMCA standard meaning accurate information that can be relied upon.

- Designed and manufactured in accordance with Machinery Directive (MD), Low Voltage Directive (LVD), Electromagnetic Compatibility Directive (EMC).

ACCESSORIES


- Different length downrod
- Remote controllers
- I-Beam fixing kit
- Glulam fixing kit

Performance @ 400Vac 50Hz


Description	No. Blades	Max Rotation Speed	Max Absorbed Power	Max Thrust	Max Air Flow AMCA 230-15			Max Air Flow AMCA 230-99		
					r/min	kW	N	cfm	m ³ /h	SPI ⁽¹⁾ W/(m ³ /s)
THS400	5	110	1,03	188	95191	161730	22,9	134620	228721	16,2
THS500	5	80	1,07	208	124849	212119	18,2	176563	299982	12,8
THS600	5	60	0,9	246	162662	276363	11,7	230038	390836	8,3
THS730	5	51	1,2	334	228696	388555	11,1	323425	549500	7,9

(1) Max absorbed power / max airflow

Dimensions

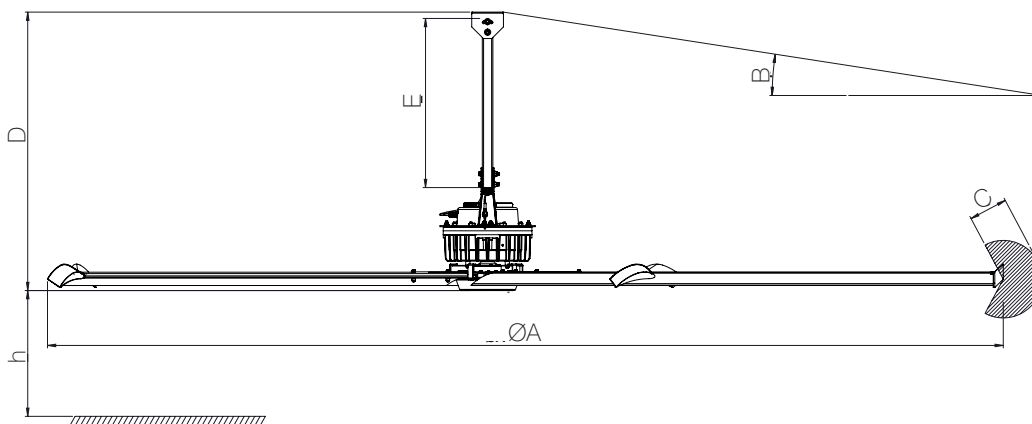


Description	ØA	B max ceiling slope	C min safety distance from side obstruction	D fan height with standard downrod	E standard downrod length	H min fan installation height	Weight
	mm	°	mm	mm	mm	mm	kg
THS400	4050	15	450	1285	800	2700	91
THS500	5050		550	1285			101
THS600	6050		650	1319			118
THS730	7300		750	1319			130

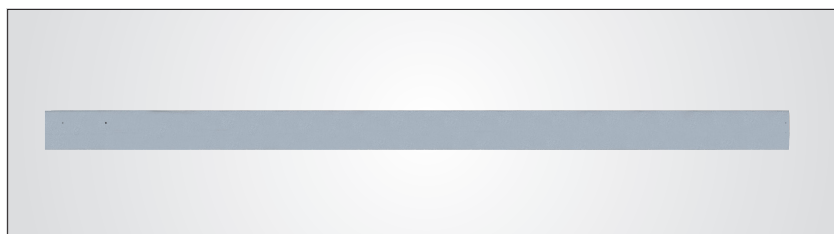

Straight blade profile



Aesthetic hub cover

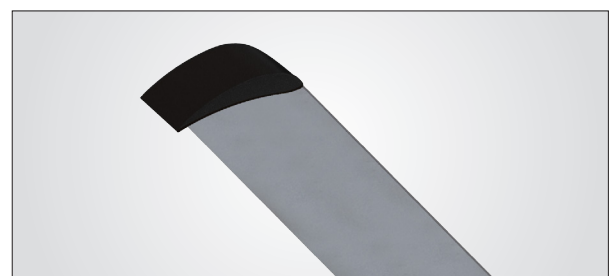

45° aerodynamic blade tip